


Frameless Glass Top Mount Installation Instructions




Installing Posts:

- Locate posts in desired locations, ensuring all posts are plumb and level.
- Maintain a maximum of 4ft (from center to center of posts).
- Measure distance between posts and add 1 3/8" to total measurements. (Ex.: If inside post to inside post measurement equals 45"...45"+1 3/8"=46 3/8", you will need to order 46 3/8" x 40" high with polished edges). You will need to order 10mm or 3/8" tempered glass.

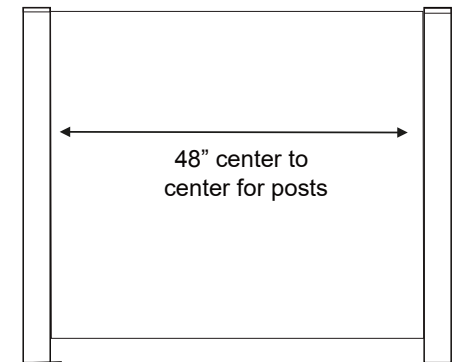


Installing Glass:

- Lubricate black glass gasket and vertical glass edges with soapy water.
- Using two people, slide glass down into post gaskets while maintaining even pressure on both sides until glass sits on support blocks in bottom of post. If glass is not seated properly, post caps may not fit.

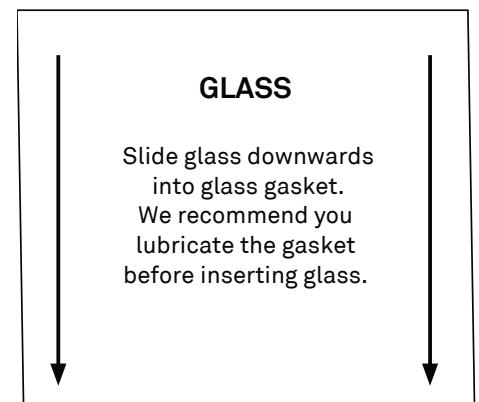

Completing Installation:

- Insert post caps.
- Press or tap down with a non-metallic tool.

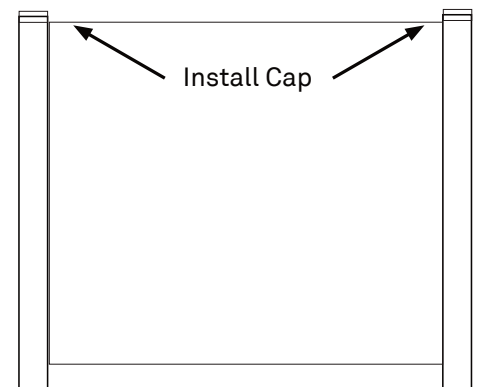

Ensure you check with your local building inspection department prior to proceeding with any purchase or work. It is the sole responsibility of the homeowner/contractor to comply with local building codes. Building codes vary from Province, State, Country, City, Town, or Borough guards with glass may require a top rail.

Vista Railings Systems
1-800-667-8247
www.vistarailings.com

Vista™ is a registered trademark of Vista Railing Systems Inc. Created on April 27, 2020.