


LFDDDDSDSBSLDRGB
 FRDFFRURORFNLSDD
 SRWAWIOLFRDFBLQLEOBDSDRWH
 BDB




2. Gire el accesorio Pull-Lock en el sentido de las agujas del reloj a medida que lo empuje en el cable. Si el cable empieza a "desenredarse", está girando el accesorio en la dirección equivocada.

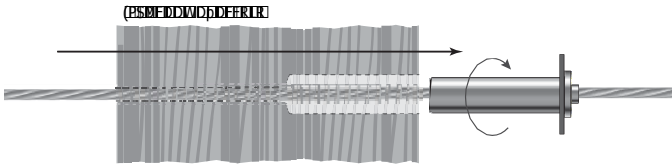

Note: If you have trouble inserting the cable into the fitting, it may be because the locking wedges have become stuck. This is not a defect! Here's what you can do to "free the wedges" –

For Pull-Lock® or Push-Lock® fittings for 1/8" cable, using either a PL-KEY or 1/4" diameter bolt, insert the PL-KEY or bolt into the hole and press until the wedges move freely. Perform the same operation for a 3/16" Pull-Lock® or Push-Lock®, except use a 16d nail or another tool with 1/8" or smaller diameter. Anything larger than what is recommended can actually get stuck inside the fitting – NOT what you want!


3. Push the Pull-Lock® fitting along the cable and firmly into the hole in your post. While holding the Pull-Lock® fitting against the end post, pull the bare end of the cable to remove as much slack in the cable as possible.

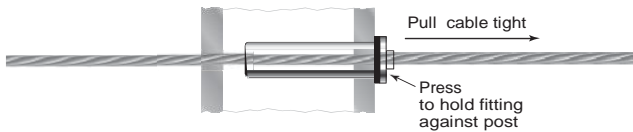

4. Cut the cable flush with the hole in the back of the fitting using a cut-off wheel.




5. Press the optional cap onto the lip of the Pull-Lock® fitting.

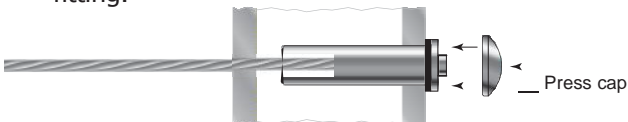


D. Tension Cables



1. Return to the Threaded Stud end post. Insert an 1/8" hex wrench into broached opening on the tip of the stud. Tighten the locknut with a 7/16" wrench while holding the hex wrench to prevent the stud from turning.

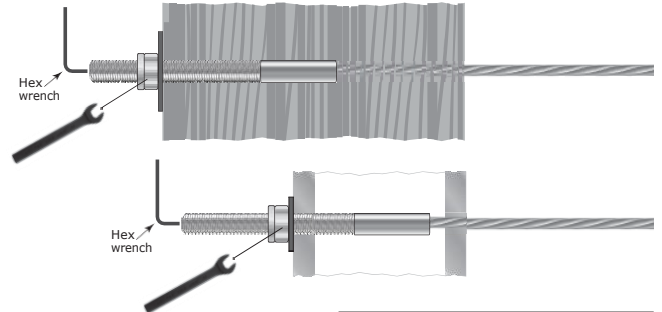

2. Tension all cables to desired amount in sequence, beginning with the center cables, moving up and down toward the top and bottom. As you tension each cable, give it a sharp pull downward mid-span to help set the wedges, then re-tension as necessary in the same sequence.

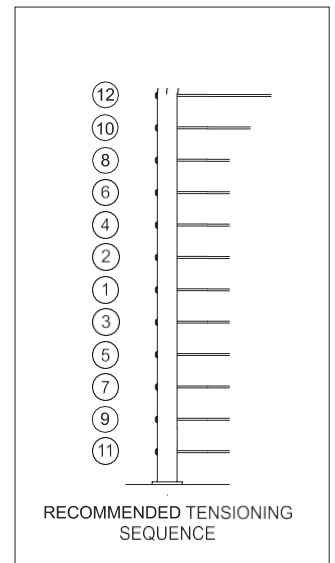

3. When all of the cables are tight, cut off any exposed thread as near to the locknut as possible by using a cut-off wheel or hack saw.

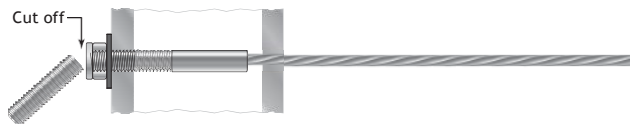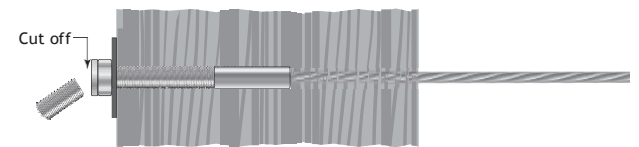

4. If you have purchased the optional nut cap, press the cap over the locknut.

